



AMENITY RANGE HOW TO INSTALL



A1 AMERICAN
QUALITY SERVICE VALUE
— SINCE 1911 —



DOVE ACTUAL PRODUCTS



833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities




A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911

DOVE BOTTLE IMAGES

5L Refills



How-to Video:

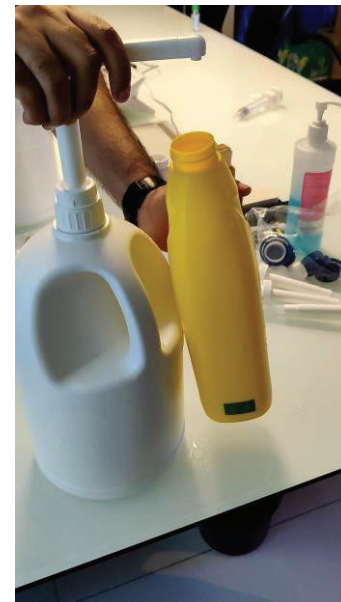

*30ml per pump stroke

833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities



A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911

DOVE REFILL SOAP



Follow steps below to refill shower dispensers containing PROFESSIONAL Dove Shampoo, Conditioner & Body Wash. Always use disposable gloves while refilling. Removing each bottle separately to refill is recommended. If dispenser bottle, cap or pump are damaged, replace.

EN

| | | | | |
|--|--|--|---|--|
| | | | | |
| <p>1</p> <p>Refilling should be done in housekeeping area. Ensure clean, stable surface.</p> <p>Place 5L refill bottle and push down firmly on industrial pump accessory using palm.</p> | <p>2</p> <p>At any time, It's important to keep pumps clean.</p> <p>Avoid touching the stem of any pumps.</p> <p>Place them in a clean empty glass, with pump facing up, or even on a clean towel.</p> | <p>3</p> <p>Refill only like-for-like product ie shampoo refill into shampoo dispenser to prevent cross contamination.</p> <p>Wipe away any spilt product, and reattach pumps.</p> <p>Filled replacement dispenser bottles can then be loaded onto trolleys for in-room swapping of empty bottles.</p> | <p>4</p> <p>Use the hex key shown above, to loosen the nuts which releases the neck bracket that secures the dispenser bottles.</p> <p>Remove empty bottles and replace.</p> <p>Do not rinse the bottle with water before refilling, the refilling should be only topped over the current fill.</p> | <p>5</p> <p>Ensure the bracket is sitting snugly on the pump neck.</p> <p>Use hex key to tighten nuts such that bracket presses down on the dispenser bottles tightly and cannot be removed by hand.</p> |

STORAGE INSTRUCTIONS: Store product in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities



A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911

DOVE BRACKET INSTALLATION


Starter Guide



How to Determine Installation Placement

The unit must be mounted to the wall opposite from the showerhead, minimizing direct water spray from the shower.


Fixture should be installed at a height of 4' from shower / bath base.



Required fixture location for ADA shower:

2. Forward Reach.

1. Unobstructed. Where a forward reach is unobstructed, the high forward reach shall be 48 inches (1220 mm) maximum and the low forward reach shall be 15 inches (380 mm) minimum above the finish floor or ground.



833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities



A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911



DOVE BRACKET INSTALLATION

Starter Guide

Top Tips

- Mount using best possible application (tape and or screws) for your wall surface.
- IHG-recommended application for new build and conversion hotels is with two stainless steel screws, located at top of fixtures and double-sided tape. For existing hotels, recommendation is double-sided tape only.
- Required fixture placement within tub/shower is outlined below.
- *Make certain the tile/marble area provides a smooth, clean, dry surface.*

833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities



A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911



DOVE FIXTURE MOUNTING (SCREW)


Screw mounting technique varies by wall surface and backing (substrate). Verify your individual wall surface and backing prior to drilling and screwing in fixtures so as to not damage tile surface or backing.

1. You **MUST** clean the back of the fixture, as well as the surface where the unit is to be mounted with rubbing (Isopropyl) alcohol to ensure that any soap film is removed and allowed to dry before installing.

NOTE: If this step is not done properly, the fixture will not securely adhere to the wall, and could fall and potentially damage tub /shower

2. Apply two pieces of double stick tape to create best possible bond with shower wall surface and remove protective backings.
3. Apply a thin bead of tub and tile silicone around the back perimeter of the unit prior to mounting, to prevent water from accumulating behind the unit.
4. Press firmly against the wall for one minute, using a level to ensure the unit is installed correctly.
5. Use stainless steel screws to further secure fixture to wall based on surface requirements.
6. The silicone should be allowed to cure for at least 12 hours prior to installing bottles.

Only stainless steel screws should be used.
Tape not intended for use on dry wall.



833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities



A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911



DOVE FIXTURE MOUNTING (TAPE)

When applying tape:

1. You **MUST** clean the back of the fixture, as well as the surface where the unit is to be mounted with rubbing (Isopropyl) alcohol to ensure that any soap film is removed and allowed to dry before installing.

NOTE: If this step is not done properly, the fixture will not securely adhere to the wall, and could fall and potentially damage tub /shower

2. Apply two pieces of double stick tape to create best possible bond with shower wall surface and remove protective backings.
3. Apply a thin bead of tub and tile silicone around the back perimeter of the unit prior to mounting, to prevent water from accumulating behind the unit.
4. Press firmly against the wall for one minute, using a level to ensure the unit is installed correctly.
5. The silicone should be allowed to cure for at least 12 hours prior to installing bottles.
6. The silicone should be allowed to cure for at least 12 hours prior to installing bottles.

Tape not intended for use on dry wall.

Due to the fact that surfaces and substrate will vary, all installation is the responsibility of the purchaser/installer. Aquamenities accepts **NO** responsibility for installation.



833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities




A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911



DOVE BOTTLE INSTALLATION

Bottle Installation


Once fixture is properly mounted and silicone set, unlock fixture and insert one full bottle of each product as outlined below.
Bottles should be inserted in the following order (left to right): shampoo, conditioner, body wash



1. Insert key into locking mechanism press and turn counterclockwise.



2. Pull face of bracket forward and slip bottle and pump out carefully through the top hole.



3. Reinsert full bottle carefully, line up bracket, use key to push and turn clockwise to lock.



4. Take empty bottles to housekeeping station/ Heart of House. Remove pump and fill all bottles with product.

833.205.2200

Sales@a1americangroup.com | www.a1americangroup.com/amenities



A1 AMERICAN
QUALITY SERVICE VALUE
SINCE 1911